


Air Hammers & Scalers

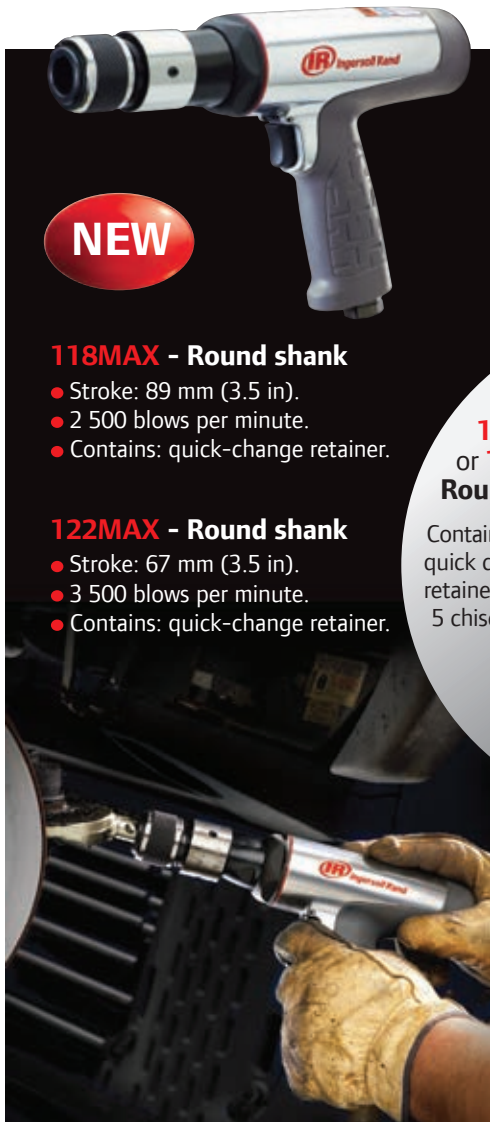

NEW

118MAX - Round shank

- Stroke: 89 mm (3.5 in).
- 2 500 blows per minute.
- Contains: quick-change retainer.

122MAX - Round shank

- Stroke: 67 mm (3.5 in).
- 3 500 blows per minute.
- Contains: quick-change retainer.

118MAXX or 122MAXX Round shank

Contains: hammer, quick change retainer and 5 chisels.



121/Q - Round shank

- Stroke: 58 mm (2.3 in).
- 3 000 blows per minute.



115-Round shank

- Stroke 41mm (1.63")
- 5,000 blows per minute

116-Round shank

- Stroke 67mm (2.6")
 - 3,500 blows per minute
- Power regulator.

117-Round shank

- Stroke 89mm (3.5")
- 2,000 blows per minute.

*115K/116K/117K - includes 5 - piece chisels kit

121-K6 - Round shank

- Contains 121/Q and 6 chisels



122MAXX



121-K6



125

- Stroke: 28 mm (1.1 in)
- 4 600 blows per minute.
- Contains: NS11-122-19

125CI-Chisel Scaler

Accessories: sets of 19 needles

	Material	Length
NS11-122-19	Steel	178 mm
NS11-22-19	Steel	127 mm
NS11-522-19	Stainless steel	127 mm
NS11-B22-19	Beryllium copper	127 mm

Hammer Accessories

- 115-183 (CPN: 03788510): spring retainer for 115,116 & 117.
- AVC10-183 (CPN: 03010980): spring retainer for 121/Q.
- 9512 (CPN: 45563749): quick-change retainer for 121/Q,118MAX & 122MAX
- 9500 (CPN: 80117427): chisels, round shank (5 pieces).



115-183



9512



9500

Specifications at 6.2 bar (90 psi)

	1 min.	mm	mm	kg	mm	NPTF	mm	L/s	Max L/s	dB(A)	m/s ² / K(1)
Air Hammers - Round shank											
121/Q	3 000	10.2	58	1.59	194	1/4"	10	1.4	7.1	95.3	19.9 / 4.6
122MAX	3 500	10.2	67	1.80	218	1/4"	10	1.4	5.5	94.2	5.5 / 1.8
118MAX	2 500	10.2	89	2.10	314	1/4"	10	1.4	5.5	92.6	4.0 / 1.4
116	3 500	10.2	67	1.54	198	1/4"	10	1.4	7.1	101.4	14.8 / 2.2
Air Needle Scaler											
125	4 600	-	28.6	2.83	465	1/4"	8	3.8	7.1	96.6	8.3 / 1.3

(1) ISO28927 - 3-axis measurement: vibration level / measurement uncertainty.