




STM Model - Larger View Window Scale (Click) Torque Wrench

- Unique window scale with fine increments.
- Accuracy is $\pm 4\%$ of the reading value.
- Ergonomic, non-slip handle.
- Push/Pull end cap to secure the set torque value from accidental change.
- This wrench is longer than normal torque wrench, more efficiently while long time using.
- Alloy tube, chrome plated, high strength, more durable.
- Various kinds of heads designed for different applications:
 - STMX model: Push-through ratchet head for clockwise and counter-clockwise operation.
 - STML model: Tear-shape ratchet head, both directions, easily operated reverse lever.
 - STMH model: Head holder, for 9x12mm, 14x18mm, 24x32mm rectangular shank heads.
 - STMR model: Round head holder $\Phi 16$, accommodate varied relevant round hole inserts.



Double Window Scales



① Pull to unlock




② Turn the handle to adjust the torque



③ Push to lock

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

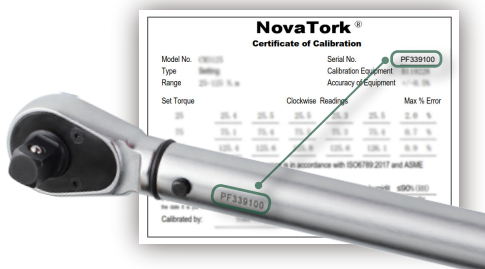


Shockproof packaging

Specially designed for all series of "NovaTork" torque products



STMX

Push-through Ratchet Head STM Torque Wrench
for Clockwise and Counter-clockwise operation

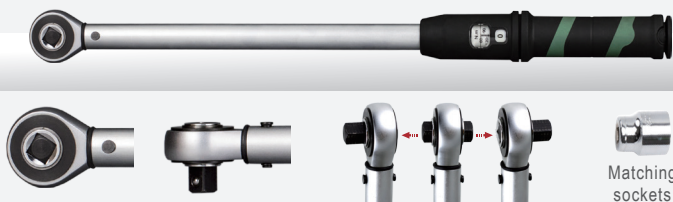

(Metric)

Item No.	Square Drive	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
STMX3100	1/2"	20-100	15-75	0.5	438	48	1.1
STMX3200	1/2"	40-200	30-150	1	505	48	1.3
STMX3300	1/2"	60-300	45-225	1.5	565	48	1.4
STMX3400	1/2"	80-400	60-300	2	700	50	1.99
STMX4550	3/4"	100-550	80-405	3	889	70	3.67
STMX4750	3/4"	150-750	110-550	5	1110	70	4.1
STMX4850	3/4"	200-850	150-650	5	1210	70	4.55
STMX41000	3/4"	200-1000	150-750	5	1210	70	4.55
STMX51500	1"	300-1500	200-1100	10	1710	90	6.5
STMX52000	1"	400-2000	300-1500	10	1810	90	6.8

STMH

Rectangular Shank Head Holder STM Torque Wrench
for 9x12, 14x18, 24x32mm rectangular shank head inserts




(Metric)

Item No.	Shank Size mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
STMH9100	9x12	20-100	15-75	0.5	423	43	0.9
STMH9150	9x12	30-150	25-115	1	463	43	1.1
STMH14150	14x18	30-150	25-115	1	467	43	1.1
STMH14200	14x18	40-200	30-150	1	494	43	1.2
STMH14300	14x18	60-300	45-225	1.5	554	43	1.2
STMH14400	14x18	80-400	60-300	2	707	56	1.6
STMH24550	24x32	100-550	80-405	2.5	889	56	2
STMH24750	24x32	150-750	100-550	5	1110	56	4
STMH24850	24x32	200-850	150-650	5	1260	56	4.2

STML

Tear-shape Ratchet Head STM Torque Wrench
Both directions, easily operated reverse lever

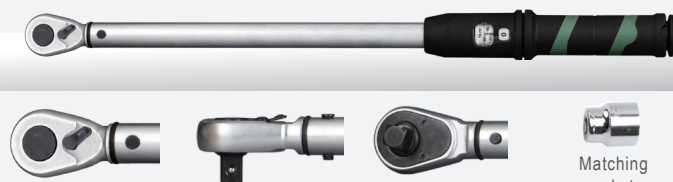

(Metric)

Item No.	Square Drive	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
STML3100	1/2"	20-100	15-75	0.5	448	43	1.1
STML3200	1/2"	40-200	30-150	1	515	43	1.3
STML3300	1/2"	60-300	45-225	1.5	575	43	1.4

STMR

Round Head Holder STM Torque Wrench
for Φ16mm round hole inserts



(Metric)

Item No.	Round Hole mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
STMR16100	Φ 16	20-100	15-75	0.5	423	43	0.9
STMR16200	Φ 16	40-200	30-150	1	487	43	1.1
STMR16300	Φ 16	60-300	45-225	1.5	545	43	1.2
STMR16400	Φ 16	80-400	60-300	2	700	43	1.3

For more details, please contact:

TY HARDWARE & MACHINERY SDN BHD

35 Jalan Metro Perdana Barat 11, Sri Edaran Industrial Park, 52100 Kuala Lumpur, Malaysia

Tel : +603 6259 5990, +6019-213 9990 Fax: +603 6250 8016 Email: inquiry@tyhardware.com.my