




Front Hollow Pipe ▲

P Model - Preset Torque Wrench

- Easy to adjust to desired torque (in the tool room, appropriate torque tester is required).
- Operator cannot change set torque by accident or by mistake.
- +/-4% Accuracy in clockwise direction from 20% to 100% Max.Torque.

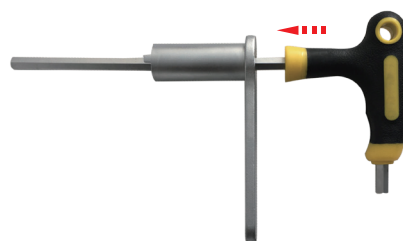


Torque Adjusting Tool

- Various kinds of heads designed for different applications:
 - PC model: Reversible ratchet head for clockwise and counter-clockwise operation and can be operated with 8 degrees swing in small spaces.
 - PCH model: Head holder for standard 9x12, 14x18, 24x32, 27x36mm square shank heads.

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

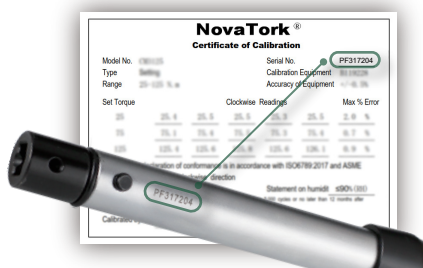

Shockproof packaging


Specially designed for all series of "NovaTork" torque products



PC

Reversible Ratchet Head P Torque Wrench

Bi-directional operation, 8 degrees swing, suitable for confined space



(Metric)


Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
PC112	1/4"	2.5-12	20-205*	184	30	0.45
PC120	1/4"	4-20	30-180*	184	30	0.45
PC230	3/8"	6-30	50-250*	214	37	0.5
PC260	3/8"	10-60	9.0-45	255	38	0.56
PC2125	3/8"	25-125	20-90	366	38	0.79
PC3200	1/2"	40-200	30-150	457	40	1.2
PC3340	1/2"	65-340	50-250	691	40	1.96
PC4500	3/4"	100-500	80-400	915	57	2.8
PC4650	3/4"	150-650	100-500	915	57	2.8
PC4800	3/4"	160-800	120-600	1030	60	5
PC41000	3/4"	200-1000	150-750	1260	60	6
PC51000	1"	200-1000	150-750	1260	60	6

*Unit is Lb.in

PCH

Rectangular Shank Head Holder P Torque Wrench

for 9x12, 14x18, 24x32, 27x36mm rectangular shank head inserts



Optional fittings:

(Metric)

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
PCH920	9X12	4-20	30-180*	155	28	0.24
PCH925	9X12	5-25	45-225*	178	28	0.28
PCH950	9X12	5-50	4.0-40	240	28	0.4
PCH985	9X12	15-85	12-60	310	28	0.51
PCH9120	9X13	25-120	20-90	355	28	0.6
PCH14200	14X18	40-200	30-150	424	32	0.86
PCH14300	14X18	50-300	40-225	688	32	1.3
PCH14500	14X18	100-500	80-400	970	56	2.56
PCH24650	24X32	150-650	100-500	1030	56	4.9
PCH24800	24X32	160-800	120-600	1030	56	4.9
PCH241000	24X32	200-1000	150-750	1260	56	5.7
PCH271500	27X36	300-1500	400-1100	1610	64	8

*Unit is Lb.in

Note: Due to the product improvement, the technical parameters are subject to variation, please refer to the actual production from the factory.

For more details, please contact:

TY HARDWARE & MACHINERY SDN BHD

35 Jalan Metro Perdana Barat 11, Sri Edaran Industrial Park, 52100 Kuala Lumpur, Malaysia

Tel : +603 6259 5990, +6019-213 9990 Fax: +603 6250 8016 Email: inquiry@tyhardware.com.my