



C Model - Adjustable (Click) Torque Wrench, Double Window Scales

- Unique double window scale with fine increments.
- 1/20 of increment on main scale.
- Convenient Metric or English major scale with English or Metric secondary scale.
- +/-4% Accuracy in clockwise direction from 20% to 100% Max.Torque.
- Pull & push, stay-in-place locking ring on the bottom handle secures selected torque from accidental change.
- Ergonomic, non-slip soft grips are comfortable to use under all conditions and long durations.
- Various kinds of heads designed for different applications:
 - CM / C model: have fine-tooth ratchets suitable for operation in confined spaces requiring only 8 degrees swing.
 - CMH / CH model: Head holder model for standard 9x12mm, 14x18mm, 24x32mm, 27x36mm rectangular shank heads.
 - CMR model: Round head holder for $\Phi 16\text{mm}$, $\Phi 22\text{mm}$ heads.



100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration



Shockproof packaging

Specially designed for all series of "NovaTork" torque products



CM

Reversible Ratchet Head C Torque Wrench

Bi-direction operation, 8 degrees swing, suitable for confined space

C (English unit)



Large Size ▼

(Metric)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CM1012	1/4"	2.5-12	20-105*	0.025	285	38	0.54
CM1020	1/4"	4.0-20	30-180*	0.05	285	38	0.54
CM2030	3/8"	6.0-30	50-250*	0.075	313	38	0.68
CM3030	1/2"	6.0-30	50-250*	0.075	313	38	0.68
CM2060	3/8"	10-60	9-45	0.125	383	38	0.82
CM3060	1/2"	10-60	9-45	0.125	383	38	0.82
CM2100	3/8"	20-100	15-75	0.25	438	38	0.9
CM3100	1/2"	20-100	15-75	0.25	438	38	0.9
CM2125	3/8"	25-125	20-90	0.25	438	38	0.9
CM3125	1/2"	25-125	20-90	0.25	438	38	0.9
CM3200	1/2"	40-200	30-150	0.5	463	40	1.02
CM3335	1/2"	65-335	50-250	0.75	523	40	1.16
CM4335	3/4"	65-335	50-250	0.75	523	40	1.2
CM4500	3/4"	100-500	80-400	1.25	840	60	4.04
CM4800	3/4"	160-800	120-600	2	1040	60	4.93
CM5800	1"	160-800	120-600	2	1040	60	4.93
CM41000	3/4"	200-1000	150-750	2.5	1040	60	4.93
CM51000	1"	200-1000	150-750	2.5	1040	60	4.93
CM51500	1"	300-1500	200-1100	3	1250	75	8.2
CM52000	1"	400-2000	300-1500	5	1250	75	8.2
CM53000	1"	600-3000	400-2200	7.5	1250	75	9.5
CM3200L	1/2"	40-200	30-150	0.5	525	40	1.14
CM3335L	1/2"	65-335	50-250	0.75	700	40	1.95
CM4335L	3/4"	65-335	50-250	0.75	700	40	2
CM3100S	1/2"	20-100	15-75	0.25	360	38	0.74
CM4400S	3/4"	80-400	60-300	1	700	57	2.58
CM4500S	3/4"	100-500	80-400	1.25	700	57	2.6

*Unit is Lb.in; L is extended length version; S is shorten length version.

(English)

Item No.	Square Drive	Torque Range		Increment	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
C1200	1/4"	40-200*	4.0-22	0.50*	275	38	0.54
C2250	3/8"	50-250*	60-280	0.50*	310	38	0.68
C2100	3/8"	20-100	25-135	0.25	420	38	0.9
C3100	1/2"	20-100	25-135	0.25	420	38	0.9
C3150	1/2"	30-150	40-200	0.5	460	40	1.02
C3250	1/2"	50-250	70-340	0.5	520	40	1.16
C4250	3/4"	50-250	70-340	0.5	520	40	1.2
C4400	3/4"	80-400	100-550	1	840	60	4.04
C4600	3/4"	100-600	150-800	1.25	1040	60	4.93
C5600	1"	100-600	150-800	1.25	1040	60	4.93
C3250L	1/2"	50-250	70-340	0.5	700	40	1.95
C4250L	3/4"	50-250	70-340	0.5	700	40	2


*English Unit is Lb.in; L is extended length version

CMH

Rectangular Shank Head Holder C Torque Wrench

for 9x12, 14x18, 24x32, 27x36mm rectangular shank head inserts

CH (English unit)

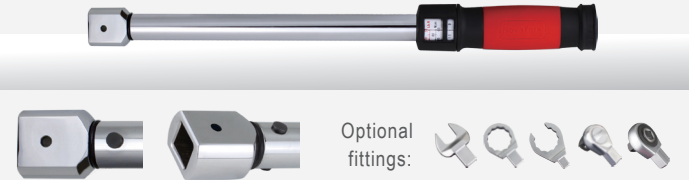

(Metric)

Item No.	Shank Size mm	Torque Range		Increment	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CMH912	9x12	2.5-12	20-105*	0.025	282	38	0.44
CMH920	9x12	4.0-20	30-180*	0.05	282	38	0.44
CMH930	9x12	6.0-30	50-250*	0.075	301	38	0.58
CMH960	9x12	10-60	9-45	0.125	370	38	0.72
CMH9100	9x12	20-100	15-75	0.25	423	38	0.8
CMH9125	9x12	25-125	20-90	0.25	423	38	0.8
CMH14200	14x18	40-200	30-150	0.5	462	38	0.92
CMH14335	14x18	65-335	50-250	0.75	522	38	1.06
CMH24500	24x32	100-500	80-400	1.25	840	56	4.04
CMH24800	24x32	160-800	120-600	2	1040	56	4.93
CMH241000	24x32	200-1000	150-750	2.5	1040	56	4.93
CMH271500	27x36	300-1500	200-1100	3	1250	64	8
CMH272000	27x36	400-2000	300-1500	5	1250	64	8
CMH273000	27x36	600-3000	400-2200	7.5	1250	64	9.3
CMH14335L	14x18	65-335	50-250	0.75	702	38	1.85
CMH24400S	24x28	80-400	60-300	1	700	56	2.6
CMH24500S	24x32	100-500	80-400	1.25	700	56	2.75

*Unit is Lb.in; L is extended length version; S is shorten length version.

(English)


Item No.	Shank Size mm	Torque Range		Increment	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
CH9200	9x12	40-200*	4.0-22	0.50*	263	38	0.44
CH9250	9x12	50-250*	6.0-30	0.50*	298	38	0.58
CH9100	9x12	20-100	25-135	0.25	408	38	0.8
CH14150	14x18	30-150	40-200	0.5	462	38	0.92
CH14250	14x18	50-250	70-340	0.5	522	38	1.06
CH24400	24x32	80-400	100-550	1	840	56	4.04
CH24600	24x32	100-600	150-800	1.25	1040	56	4.93
CH14250L	14x18	50-250	70-340	0.5	702	38	1.85

*English Unit is Lb.in; L is extended length version

CMR

Round Head Holder C Torque Wrench

for $\Phi 16$, $\Phi 22$ mm round hole inserts




Optional
fittings:



Item No.	Round Hole mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CMR1612	$\Phi 16$	2.5-12	20-105*	0.025	283	38	0.44
CMR1620	$\Phi 16$	4.0-20	30-180*	0.05	283	38	0.44
CMR1630	$\Phi 16$	6.0-30	50-250*	0.075	302	38	0.58
CMR1660	$\Phi 16$	10-60	9-45	0.125	371	38	0.72
CMR16125	$\Phi 16$	25-125	20-90	0.25	426	38	0.8
CMR16200	$\Phi 16$	40-200	30-150	0.5	450	38	0.92
CMR16335	$\Phi 16$	65-335	50-250	0.75	510	38	1.06
CMR16400	$\Phi 16$	80-400	60-300	1	690	38	1.85
CMR22500	$\Phi 22$	100-500	80-400	1.25	790	38	3.3
CMR22800	$\Phi 22$	160-800	120-600	2	990	38	4.2
CMR221000	$\Phi 22$	200-1000	150-750	2.5	990	38	4.2
CMR16335L	$\Phi 16$	65-335	50-250	0.75	690	38	1.85

*Unit is Lb.in; L is extended length version

Note: Due to the product improvement, the technical parameters are subject to variation, please refer to the actual production from the factory.

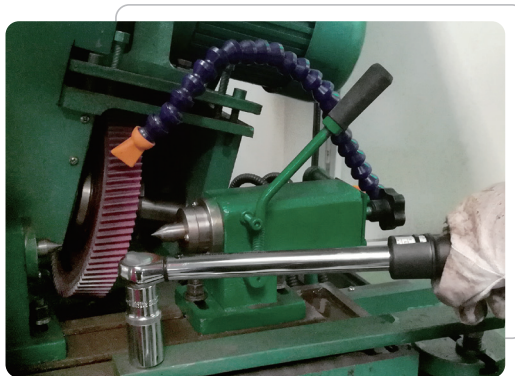

For more details, please contact:

TY HARDWARE & MACHINERY SDN BHD

35 Jalan Metro Perdana Barat 11, Sri Edaran Industrial Park, 52100 Kuala Lumpur, Malaysia

Tel : +603 6259 5990, +6019-213 9990 Fax: +603 6250 8016 Email: inquiry@tyhardware.com.my