

DA64R

- The use of Magnesium material make the nailer more lighter.
- Quick clear nose.
- Non-marring rubber driver tip.
- Adjustable knob for either sequential or contact firing.
- Strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Teflon O-ring protect the piston from wearing.
- Tool free jam release mechanism designed not to lock line on sight.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- Adjustable knob for either sequential or contact firing.
- Hard coat anodized magazine with visual reload indicator.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.



34° Angle Finish Nailer




SPECIFICATIONS

Model No. DA64R	Dimension: 320X330X80mm
weight: 2.09kg(4.6Lb)	Required Pressure: 80-120PSI(5.5-8bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

T64RC

COMPATIBLE FASTENER:

Senco FinishPro 32
Dewalt DC606K
Paslode Impulse 3250-F16
Hitachi NT65A3
Porter-c

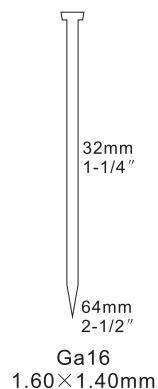

SPECIFICATIONS

Model No. T64RC	Dimension: 320x300x80mm
weight: 1.85kg(3.88Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS




2 in 1 Combi Nailer



SF3232RC

- Strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- Adjustable knob for either sequential or contact firing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.



SPECIFICATIONS


Model No. SF3232RC	Dimension: 283X248X60mm
Weight: 1.5kg(3.3Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

2 in 1 Combi Nailer



SF5040RC

- Strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- Adjustable knob for either sequential or contact firing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.

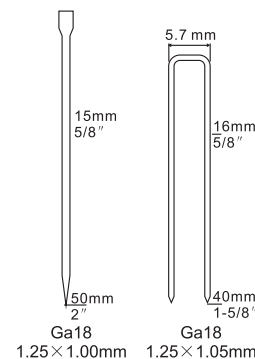

SPECIFICATIONS


Model No. SF5040RC	Dimension: 283X256X60mm
Weight: 1.6kg(3.52Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

Brad Nailer



F32RC

- Strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- Adjustable knob for either sequential or contact firing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.



Ga18
1.25×1.00mm


SPECIFICATIONS

Model No. F32RC	Dimension: 282X248X60mm
weight: 1.45kg(3.19Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



F50RC

- Strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- Adjustable knob for either sequential or contact firing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.




Ga18
1.25×1.00mm

SPECIFICATIONS

Model No. F50RC	Dimension: 283X256X60mm
weight: 1.55kg(3.41Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

Brad Nailer

- Fastener Range:
15,20,25,30,32,
35,38,40,45,50mm




Ga18
1.25×1.00mm

Stapler



7116RC

- Strong and light weight aluminum die-casting gun body.
- Rear exhaust
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.



Ga22
0.75x0.6mm


SPECIFICATIONS

Model No. 7116RC	Dimension: 48x163x242mm
weight: 1.1kg(2.42Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 200pcs



8016RC

- Strong and light weight aluminum die-casting gun body.
- Rear exhaust
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.




SPECIFICATIONS

Model No. 8016RC	Dimension: 48x163x242mm
weight: 1.16kg(2.55Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max.Pressure:120PSI(8.3bar)	Nail Capacity: 200pcs



9025RC

- Bigger strong and light weight aluminum die-casting gun body.
- Multi-directional exhaust port directs air away from operator and work surface.
- Special hardened one piece drive blade for professional application.
- Teflon O-ring protect the piston from wearing.
- Tool-free depth-of-drive adjustment for exact setting of nail head.
- STANDARD EQUIPMENT: Nailer, rugged carrying case, oil, wrenches and operating manual.



SPECIFICATIONS

Model No. 9025RC	Dimension: 274x62x234mm
weight: 1.37kg(3.01Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max.Pressure:120PSI(8.3bar)	Nail Capacity: 100pcs



Concrete Nailer

ST64X

- Sequential firing safe system.
- Heavy duty design with large piston allow to operate cement or steel.
- Alu. Oxidized magazine with hard-surface treatment.

18mm
3/4"
64mm
2-1/2"
Ga14
Φ2.2



SPECIFICATIONS

Model No. ST64B/ST64X	Dimension: 106.5X320X345mm / 90x275x330mm
weight: 3.6kg(7.9Lb) / 3.3kg(7.26Lb)	Required Pressure: 80-110PSI(5.5-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 70PCS / 90PCS

LT50

- Quick clear nose
- No-marring rubber driver tip.
- 360 degree adjustable exhaust.
- Drives 16Ga. finish nails 3/4 inch to 2 inch.
- Heat treated aluminum housing- extra heavy duty industril design.

20mm
3/4"
50mm
2"
Ga16
1.60x1.40mm




SPECIFICATIONS

Model No. LT50	Dimension: 80X280X303mm
weight: 2.3kg(5.0Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 90PCS



F30

· Trigger lock system protect the operator.




SPECIFICATIONS

Model No. F30	Dimension: 55X180X250mm
Weight: 1.25kg(2.7Lb)	Required Pressure: 60-100PSI(4-7bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



Brad Nailer

F50

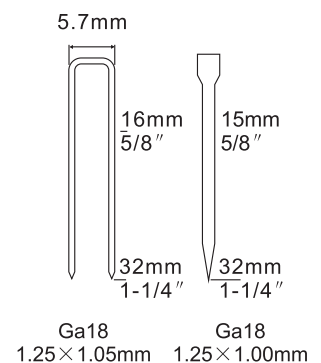

SPECIFICATIONS


Model No. SF3232	Dimension: 55X245X215mm
Weight: 1.27kg(2.79Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

NARROW/WIDE CROWN STAPLER

MILLION TIMES
without changing any parts.



8016




SPECIFICATIONS

Model No. 8016	Dimension: 45X145.5X211mm
weight: 0.85kg(1.8Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



9040C

• Quick clear nose.




SPECIFICATIONS

Model No. 9040C	Dimension: 54X242X248mm
weight: 1.45kg(3.1Lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



9040B




SPECIFICATIONS

Model No.	Dimension: 81×274×303mm(3.19"x10.79"x11.93")
weight: 2.54kg(5.5lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

NAILER/STAPLER



F30F

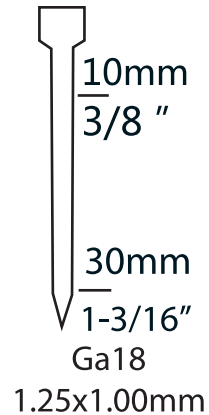


SPECIFICATIONS

Model No. F30F	Dimension: 260x185x68mm
weight: 1.22kg(2.7lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



1022JX

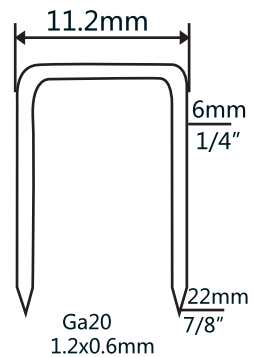


SPECIFICATIONS

Model No. 1022JX	Dimension: 235x184x61mm
weight: 1.23kg(2.706lb)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS



1013JX



SPECIFICATIONS

Model No. 1013JX	Dimension: 210x158x50mm
weight: 0.9kg(1.98lb)	Required Pressure: 65-100PSI(4.5-6.8bar)
Max. Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

3 IN 1 FLOORING NAILER



9800RC

- L, T or staple configuration.
- Ergonomic design with longer handle for easy operation.
- Composite base to eliminate scratch and damage to the surface of the wood.
- Non-Marring base is designed to allow driving of fastener close to wall.
- Using no cylinder structure, the life of the product is longer.

SPECIFICATIONS


Model No.9800RC	Dimension: 488x87x517mm
weight: 4.86kg(10.07lbs)	Required Pressure: 70-110PSI(4.8-7.5bar)
Max.Pressure: 120PSI(8.3bar)	Nail Capacity: 100pcs

PIN NAILER/PALM NAILER



H625

- Headless pin for perfect decoration without mark.
- Nail length regular automatically to desire pin length.
- Complicate with: Senco finish pro 10, Accuset a100mp, Porter cable pin100.



SPECIFICATIONS


Model No. H625	Dimension: 45X162X215mm
weight: 1.0kg(2.2Lb)	Required Pressure: 60-100PSI(4-7bar)
Max.Pressure: 120PSI(8.3bar)	Nail Capacity: 140PCS

TWO WAY AIR PINNER



H640

- Strong and light weight die cast body.
- Rubber grip handle for reducing the fatigue of operator
- Eigid nosepiece reduces jamming.
- Slight nosepiece for accurate fastening in tight space.
- Available to shoot pins with head.



SPECIFICATIONS

Model No. H640	Dimension: 220x45x207mm
weight: 1.19kg(2.61Lb)	Required Pressure: 70-110PSI(5-7.5bar)
Max.Pressure: 120PSI(8.3bar)	Nail Capacity: 100PCS

PALM NAILER




MSN90



- The use of hemicycle bolt can protect user's hand from damaging.
- Adjustable depth control for quick countersinking adjustment.
- Adjustable screw bit can be exchanged into different style.
- Light weight palm nailer reduce fatigue.
- Drive bulk nails from 5d to 70d.
- Magnetic nail guide for faster and easier driving.
- Attached with leather bag, oil pot and wrench standard nail guide and full set O-ring.



MSN120



SPECIFICATIONS

Model No. MSN90	Dimension: 103x53x103mm
weight: 0.35kg(0.8Lb)	Required Pressure: 70-100PSI(5-7bar)
Max.Pressure: 120PSI(8.3bar)	Nail Capacity: 1PC

SPECIFICATIONS

Model No. MSN120	Dimension: 128x81x129mm
weight: 0.85kg(1.8Lb)	Required Pressure: 70-100PSI(5-7bar)
Max.Pressure: 120PSI(8.3bar)	Nail Capacity: 1PC



AP9209-A

- 1 pc T64RC Finish Nailer
- 1 pc F50RC Brad Nailer
- 1 pc 9025RC Narrow Stapler
- 3 pcs Hex Key Wrenches
- 1 pc Safety Goggle
- 1 pc Oil
- 1 pc Nylon Bag



AP9202-A

- 1 pc F50RC Brad Nailer
- 1 pc 8016RC Air Stapler
- 1 pc Safety Glasses
- 1 pc Oil Pot
- 2 pcs Hex Key Wrenches
- 1 pc Blow Case



AP9200-A

- 1 pc RHF9021 Framing Nailer
- 1 pc T64RC Finish Nailer
- 1 pc F32RC Brad Nailer
- 1 pc Oil Pot
- 4 pcs Hex Key Wrenches
- 2 pcs No-mar Tip
- 3 pcs One-thousand Nails
- 1 pc Blow Case