




Large torque

### EJ Series Electronic Torque Wrench

- Accuracy: CW±2%, CCW±3% from 10% to 100% of capacity.
- Display range: 2% to 110% of maximum torque value.
- Units: Lbft, Lbin, Nm.
- Modes: Peak Torque mode, Track mode.
- Target torque can be set.
- LED light and buzzer alarming when reaches target torque.
- Automatic zero clearing when used continuously.
- Optional backlight, good for dark working condition.
- Torque error% display function.
- Battery level display.
- Automatically shut off after 2 minutes of non use.
- 3 Pcs AAA batteries, easy replacement.



Backlight Display

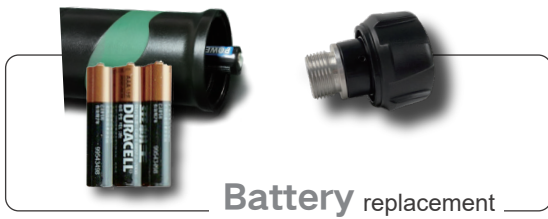

Battery replacement



- ✓ 100% (Battery level)
- ⊖ (Less than the required torque)
- ⊕ (The required torque is exceeded)
- ⊖ (Track mode)
- ⊕ (Error%)
- ⊖ (The required torque is achieved)

### EJM Model Reversible Ratchet Head Torque Wrench

Both directions, 8° swing suitable for confined space

#### EJ Model (English Unit)



#### Metric

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJM120	1/4"	2-20	17.7-177*	427	38	0.88
EJM230	3/8"	3-30	26.6-266*	427	38	0.88
EJM250	3/8"	5-50	44.3-443*	452	38	0.93
EJM2100	3/8"	10-100	7.4-73.8	482	38	1
EJM3200	1/2"	20-200	14.8-148	522	40	1.12
EJM3300	1/2"	30-300	22.1-221	590	40	1.27
EJM4400	3/4"	40-400	29.5-295	795	57	3.3
EJM4600	3/4"	60-600	44.3-443	1050	60	4.6
EJM4800	3/4"	80-800	59.0-590	1250	60	5.2
EJM41000	3/4"	100-1000	73.8-738	1250	60	5.2

\*Unit is Lb.in

#### English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJ1200	1/4"	20-200*	2.3-22.6	427	28	0.88
EJ2250	3/8"	25-250*	2.8-28.2	427	38	0.88
EJ2450	3/8"	45-450*	5.1-50.8	452	38	0.88
EJ2100	3/8"	10-100	13.5-135	482	38	1
EJ3150	1/2"	15-150	20.3-203	522	40	1.12
EJ3250	1/2"	25-250	33.9-339	590	40	1.27

\*Unit is Lb.in

### EJMH Model Rectangular Shank Head Holder Torque Wrench

For rectangular shank head inserts

#### EJH Model (English Unit)



#### Metric

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJMH920	9x12	2-20	17.7-177*	399	24	0.82
EJMH930	9x12	3-30	26.6-266*	399	24	0.82
EJMH950	9x12	5-50	44.3-443*	423	24	0.87
EJMH9100	9x12	10-100	7.4-73.8	453	24	0.93
EJMH14200	14x18	20-200	14.8-148	506	32	1.08
EJMH14300	14x18	30-300	22.1-221	575	32	1.25
EJMH14400	14x18	40-400	29.5-295	780	32	3.1
EJMH24600	24x32	60-600	44.3-443	1050	56	4.4
EJMH24800	24x32	80-800	59-590	1250	56	5
EJMH241000	24x32	100-1000	73.8-738	1250	56	5

\*Unit is Lb.in

#### English

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJH9200	9x12	20-200*	2.3-22.6	399	24	0.82
EJH9250	9x12	25-250*	2.8-28.2	399	24	0.82
EJH9450	9x12	45-450*	5.1-50.8	423	24	0.87
EJH9100	9x12	10-100	13.6-136	453	24	0.93
EJH14150	14x18	15-150	20.3-203	506	32	1.08
EJH14250	14x18	25-250	33.9-339	575	32	1.25

\*Unit is Lb.in

### EJMBQL Model Teardrop Ratchet Head Torque Wrench

Both directions, easily operated reverse lever

#### EJBQL Model (English Unit)



#### Metric

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJMBQL120	1/4"	2-20	17.7-177*	401	25	0.87
EJMBQL230	3/8"	3-30	26.6-266*	407	33	0.89
EJMBQL250	3/8"	5-50	44.3-443*	447	33	0.99
EJMBQL2100	3/8"	10-100	7.4-73.8	477	33	1.05
EJMBQL3200	1/2"	20-200	14.8-148	529	40.5	1.15
EJMBQL3300	1/2"	30-300	22.1-221	597	40.5	1.26
EJMBQL4400	3/4"	40-400	29.5-295	700	64	2.9
EJMBQL4600	3/4"	60-600	44.3-443	1050	64	4.6
EJMBQL4800	3/4"	80-800	59.0-590	1250	64	5.2
EJMBQL41000	3/4"	100-1000	73.8-738	1250	64	5.2

\*Unit is Lb.in

#### English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJBQL1200	1/4"	20-200*	2.3-22.6	401	25	0.87
EJBQL2250	3/8"	25-250*	2.8-28.2	407	33	0.89
EJBQL2450	3/8"	45-450*	5.1-50.8	447	33	0.99
EJBQL2100	3/8"	10-100	13.5-135	477	33	1.05
EJBQL3150	1/2"	15-150	20.3-203	529	40.5	1.15
EJBQL3250	1/2"	25-250	33.9-339	597	40.5	1.26

\*Unit is Lb.in

## 100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

