





C Series Double Window Scales Adjustable (Click) Torque Wrench

- Accuracy: $\pm 4\%$ in clockwise direction from 20% to 100% of capacity.
- Unique double window scale with fine increments.
- 1/20 of increment on main scale.
- Convenient Metric or English major scale with English or Metric secondary scale.
- Pull-push locking design at the end of the handle secures the selected torque from accidental change.
- Ergonomic, non-slip soft grips are comfortable to use under all conditions and long durations.
- Various kinds of heads designed for different applications:
 - CM / C model: Reversible ratchet head, fine-tooth ratchets suitable for operation in confined spaces requiring only 8 degrees swing.
 - CMH / CH model: Head holder for standard 9x12, 14x18, 24x32, 27x36mm rectangular shank heads.
 - CMR model: Round head holder for $\Phi 16$, $\Phi 22$ mm heads.

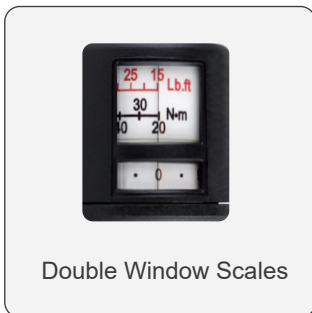

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

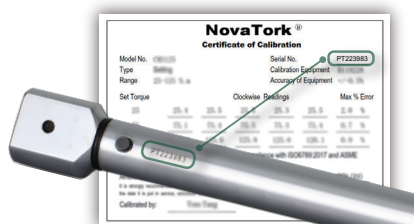

Shockproof packaging

Specially designed for all series of "NovaTork" torque products



CM Model Reversible Ratchet Head Torque Wrench

Both directions, 8° swing suitable for confined space

C Model (English Unit)



Item No.	Square Drive	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CM1012	1/4"	2.5-12	20-105*	0.025	285	38	0.54
CM1020	1/4"	4.0-20	30-180*	0.05	285	38	0.54
CM2030	3/8"	6.0-30	50-250*	0.075	313	38	0.68
CM3030	1/2"	6.0-30	50-250*	0.075	313	38	0.68
CM2060	3/8"	10-60	9-45	0.25	383	38	0.82
CM3060	1/2"	10-60	9-45	0.25	383	38	0.82
CM2100	3/8"	20-100	15-75	0.25	438	38	0.9
CM3100	1/2"	20-100	15-75	0.25	438	38	0.9
CM2125	3/8"	25-125	20-90	0.25	438	38	0.9
CM3125	1/2"	25-125	20-90	0.25	438	38	0.9
CM3200	1/2"	40-200	30-150	0.5	463	40	1.02
CM3335	1/2"	65-335	50-250	0.75	523	40	1.16
CM3400	1/2"	80-400	60-300	2	700	40	1.65
CM4335	3/4"	65-335	50-250	0.75	523	40	1.2
CM4500	3/4"	100-500	80-400	1.25	840	60	4.04
CM4800	3/4"	160-800	120-600	2	1040	60	4.93
CM5800	1"	160-800	120-600	2	1040	60	4.93
CM41000	3/4"	200-1000	150-750	2.5	1040	60	4.93
CM51000	1"	200-1000	150-750	2.5	1040	60	4.93
CM51500	1"	300-1500	200-1100	3	1250	75	8.2
CM52000	1"	400-2000	300-1500	5	1250	75	8.2
CM53000	1"	600-3000	400-2200	7.5	1250	75	9.5
CM3200L	1/2"	40-200	30-150	0.5	525	40	1.14
CM3335L	1/2"	65-335	50-250	0.75	700	40	1.95
CM4335L	3/4"	65-335	50-250	0.75	700	40	2
CM3100S	1/2"	20-100	15-75	0.25	360	38	0.74
CM4400S	3/4"	80-400	60-300	1	700	57	2.58
CM4500S	3/4"	100-500	80-400	1.25	700	57	2.6

*Unit is Lb.in; L is extended length version; S is shorten length version.

English

Item No.	Square Drive	Torque Range		Increment Lb.ft	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
C1200	1/4"	40-200*	4.0-22	0.50*	273	38	0.58
C2250	3/8"	50-250*	6.0-30	0.50*	314	38	0.68
C2100	3/8"	20-100	25-135	0.25	420	38	0.99
C3100	1/2"	20-100	25-135	0.25	420	38	1
C3150	1/2"	30-150	40-200	0.5	462	40	1.02
C3250	1/2"	50-250	70-340	0.5	525	40	1.16
C4250	3/4"	50-250	70-340	0.5	525	40	1.2
C4400	3/4"	80-400	100-550	1	840	60	4.04
C4600	3/4"	100-600	150-800	1.25	1040	60	4.93
C5600	1"	100-600	150-800	1.25	1040	60	4.93
C3250L	1/2"	50-250	70-340	0.5	700	40	1.95
C4250L	3/4"	50-250	70-340	0.5	700	40	2

*English Unit is Lb.in; L is extended length version

CMH Model Rectangular Shank Head Holder Torque Wrench

For rectangular shank head inserts

CH Model (English Unit)



Item No.	Shank Size mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CMH912	9x12	2.5-12	20-105*	0.025	279	38	0.44
CMH920	9x12	4.0-20	30-180*	0.05	279	38	0.44
CMH930	9x12	6.0-30	50-250*	0.075	298	38	0.58
CMH960	9x12	10-60	9-45	0.25	367	38	0.72
CMH9100	9x12	20-100	15-75	0.25	422	38	0.8
CMH9125	9x12	25-125	20-90	0.25	422	38	0.8
CMH14200	14x18	40-200	30-150	0.5	448.5	38	0.92
CMH14335	14x18	65-335	50-250	0.75	508.5	38	1.1
CMH14400	14x18	80-400	60-300	2	700	35	2.02
CMH24500	24x32	100-500	80-400	1.25	840	56	4.04
CMH24800	24x32	160-800	120-600	2	1040	56	4.93
CMH241000	24x32	200-1000	150-750	2.5	1040	56	4.93
CMH271500	27x36	300-1500	200-1100	3	1250	64	8
CMH272000	27x36	400-2000	300-1500	5	1250	64	8
CMH273000	27x36	600-3000	400-2200	7.5	1250	64	9.3
CMH14335L	14x18	65-335	50-250	0.75	695	38	1.85
CMH24400S	24x28	80-400	60-300	1	700	56	2.6
CMH24500S	24x32	100-500	80-400	1.25	700	56	2.75

Unit is Lb.in; L is extended length version; S is shorten length version.

English

Item No.	Shank Size mm	Torque Range		Increment Lb.ft	Length mm	Width mm	Weight kg
		Lb.ft	N.m				
CH9200	9x12	40-200*	4.0-22	0.50*	260	38	0.44
CH9250	9x12	50-250*	6.0-30	0.50*	295	38	0.58
CH9100	9x12	20-100	25-135	0.25	405	38	0.8
CH14150	14x18	30-150	40-200	0.5	448.5	38	0.92
CH14250	14x18	50-250	70-340	0.5	508.5	38	1.06
CH24400	24x32	80-400	100-550	1	840	56	4.04
CH24600	24x32	100-600	150-800	1.25	1040	56	4.93
CH14250L	14x18	50-250	70-340	0.5	695	38	1.85

English Unit is Lb.in; L is extended length version

CMR Model Round Head Holder Torque Wrench

For round hole inserts



Item No.	Round Hole mm	Torque Range		Increment N.m	Length mm	Width mm	Weight kg
		N.m	Lb.ft				
CMR1612	φ 16	2.5-12	20-105*	0.025	283	38	0.44
CMR1620	φ 16	4.0-20	30-180*	0.05	283	38	0.44
CMR1630	φ 16	6.0-30	50-250*	0.075	302	38	0.58
CMR1660	φ 16	10-60	9-45	0.25	371	38	0.72
CMR16125	φ 16	25-125	20-90	0.25	426	38	0.8
CMR16200	φ 16	40-200	30-150	0.5	450	38	0.92
CMR16335	φ 16	65-335	50-250	0.75	510	38	1.06
CMR22500	φ 22	100-500	80-400	1.25	790	38	3.3
CMR22800	φ 22	160-800	120-600	2	990	38	4.2
CMR221000	φ 22	200-1000	150-750	2.5	990	38	4.2
CMR16335L	φ 16	65-335	50-250	0.75	690	38	1.85

*Unit is Lb.in; L is extended length version