




Note: Torque Tester and Torque Wrench are not included in this model.


TS-TEM-CH Series Trolley for Torque Wrench Testing

- Designed for mobile testing or calibration of torque wrenches on production lines.
- The table is arranged with the position of the meter, transducer, and moveable reaction bar.
- There is a hand wheel on the front side. The large diameter hand wheel can be easily turned to test the torque wrench with controlled speed of force application.
- The trolley has four wheels, two are swivel casters with brakes. You can easily push the trolley to the production site by holding the handle, and step on the brakes of the wheels to secure the trolley.
- The trolley is equipped with storage drawers, where sensors, USB cables and auxiliary tools can be placed.
- L type with extended reaction bar, the extension bar is actuated by an electric motor automatically propped up by the electric pusher, which is very convenient.

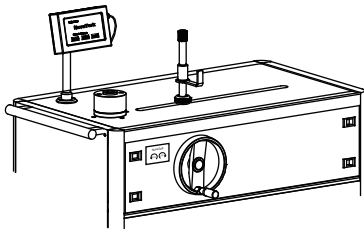

TS-TEM-CH Model

- Max. measurable torque: 400 N.m
- Adjustable reaction bar for torque wrench: 130-700 mm
- Length x Width x Height: 1115x605x1365mm
- Net weight: 101 kg

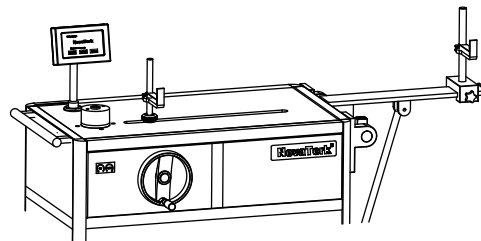

TS-TEM-CHL Model With Extension Bar

- Max. measurable torque: 1250 N.m
- Adjustable reaction bar for torque wrench: 130-1450 mm
- Extension bar extended (LxWxH): 730x750x1300mm
- Extension bar retracted (LxWxH): 560x750x1300mm
- Net weight: 155 kg



Matching NovaTork TEM torque tester, please check TEM model for details